


Interface Cable (AZ210)

This is used for the DX10-28S (HRS) or equivalent connector mounted on the target board.

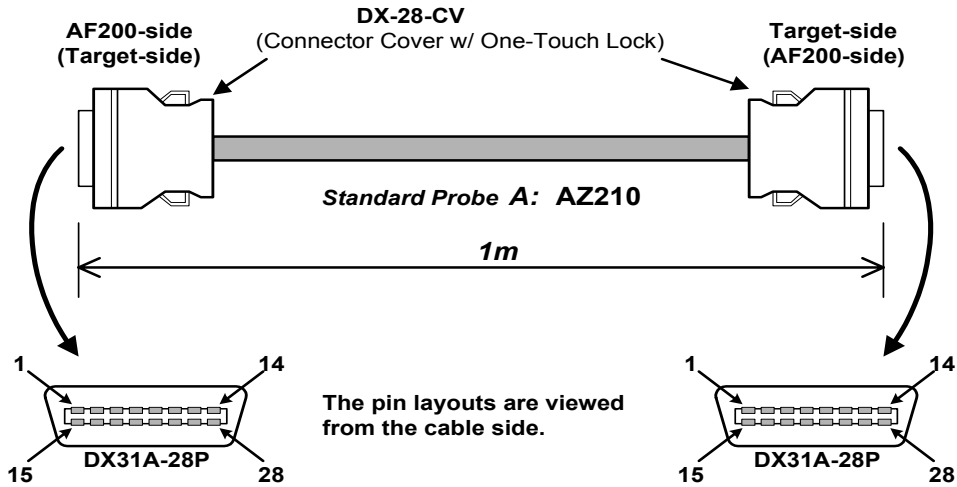

AZ210 Wiring Table

AZ210 : AF200-side(Target-side)
Standard Signal Pin Assign

Pin No.	AF200 Standard Signal Name
1	GND
2	TVcc
3	Vcc
4	TRES
5	/TRES
6	TCK
7	GND
8	GND
9	TAUX2 (TR/W)
10	/TICS
11	TAUX5 (/TOE)
12	TMODE
13	TTXD
14	GND
15	GND
16	TVpp1
17	TVpp2
18	WDT
19	TAUX3 (TVpp1C)
20	TAUX4 (TVpp2C)
21	GND
22	GND
23	TAUX
24	TBUSY
25	TIO
26	TI1
27	TRXD
28	GND

AZ210 : Target-side(AF200-side)
Standard Signal Pin Assign

Pin No.	AF200 Standard Signal Name
1	GND
2	TVcc
3	Vcc
4	TRES
5	/TRES
6	TCK
7	GND
8	GND
9	TAUX2 (TR/W)
10	/TICS
11	TAUX5 (/TOE)
12	TMODE
13	TTXD
14	GND
15	GND
16	TVpp1
17	TVpp2
18	WDT
19	TAUX3 (TVpp1C)
20	TAUX4 (TVpp2C)
21	GND
22	GND
23	TAUX
24	TBUSY
25	TIO
26	TI1
27	TRXD
28	GND

Full 28 pin-to-pin wired.